



# ANLY TIMER

ANLY

## SST-3 SOLID STATE TIMER



### CHARACTERISTIC :

- Contact-Free control for fast operation and long life
- Humidity resistant, suitable for air conditioner and refrigeration equipment
- Delay start - using auto lock-rotor feature to avoid generators and pumps being damaged due to repeated attempt to restart in short intervals


### SPECIFICATION :

Operating voltage	AC(V): 24, 120, 230
Allowable operating voltage range	85~110% of rated operating voltage
Rated frequency	50 / 60 Hz
Contact rating	250VAC 1A (resistive load)
Reset time	MAX 0.2S
Power consumption	Approx. 2VA
Life	Electrical: 100,000 times
Ambient temperature	-10 ~ +50°C (without condensation & freezing)
Ambient humidity	MAX 85%RH (without condensation)
Altitude	MAX 2000m
Weight	Approx. 55g


### TYPE SELECTION :

Type	SST-3
Output contact	1a (1Amp)
Time range	2M, 3M or 5M FIXED

## CONNECTION :



## DIMENSIONS : (mm)

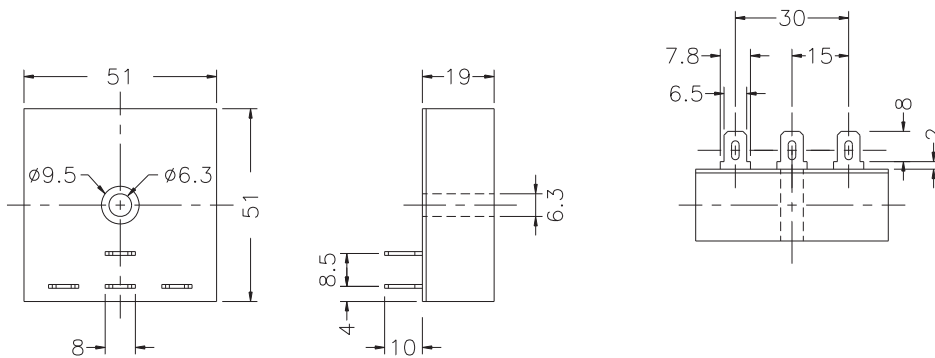

Tolerance:  $\pm 0.1$

## ANLY ELECTRONICS CO., LTD.

<http://www.anly.com.tw>

**TAIWAN MAIN OFFICE : ANLY ELECTRONICS CO., LTD.**

No.19, Lane 202, Fushou St., Xinzhuang Dist., New Taipei City 242, Taiwan  
TEL: +886-2-2996-3202 FAX: +886-2-2996-2017

**HONG KONG OFFICE : ANLY ELECTRONICS (HK) LTD.**

Flat K, 13/F, Edward Mansion, 141 Prince Edward Road W., Kowloon, Hong Kong  
TEL: +852-2397-2505 FAX: +852-2397-6080

**CHINA OFFICE : ANLY TECHNOLOGY (WUXI) CO., LTD.**

2F, Building A, Plot 1, No. 28, Zhanhong Rd., Xinwu Dist., Wuxi, Jiangsu, P.R.China  
TEL: +86-510-85304801-3

**MALAYSIA OFFICE : JUSTY ELECTRONICS (M) SDN, BHD.**

No.1, Jalan 6/89B, Kawasan Perindustrian Trisegi, Batu 3 1/2 Off Jalan Sungei Besi, 57100 Kuala Lumpur, Malaysia  
TEL: +60-3-7983-5758 FAX: +60-3-7981-5052

**INDONESIA OFFICE : PT. ANLY ELECTRONICS INDONESIA**

Jl. Pangeran Jayakarta 117/B9, Jakarta Pusat, 10730 Indonesia  
TEL: +62-21-624-8436 FAX: +62-21-626-1228

NO. SST3-W-A